


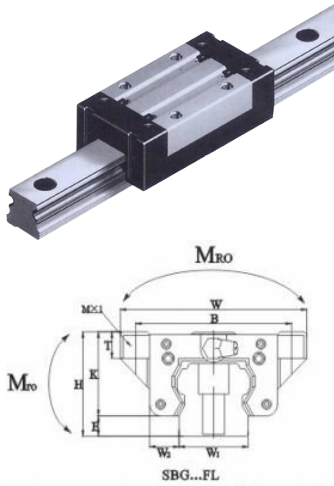

Type :	SBG25SL
Mounting Dimensions	
Height(H) :	40
E :	5.2
W2 :	12.5
Width(W) :	48
Length(L) :	83
Block Dimensions	
Mounting tab hole(B×J) :	35*35
Mounting tab hole(M×L) :	M6*8
L1 :	59.5
J1 :	12.25
K :	35.5
T :	8
Nipple Mounting Hole :	M6*0.75
Nipple(T1) :	9.95
Nipple(N) :	12
Rail Size	
Width(W1) :	23
Height(H1) :	21.8
Pitch(F) :	60
Bolt Hole(d×D×h) :	7*11*9
G :	20
Max.length Of rail Lomax :	4480
Load capacity	
Dynamic C(kgf) :	2020
Sationary Co(kgf) :	3500
Stationary moment(kgf.M) MRO :	36
Stationary moment(kgf.M) MPO :	32
Stationary moment(kgf.M) MRO :	31
Weight	
bearing (kgf) :	0.44
rail (kgf/M) :	3.14