


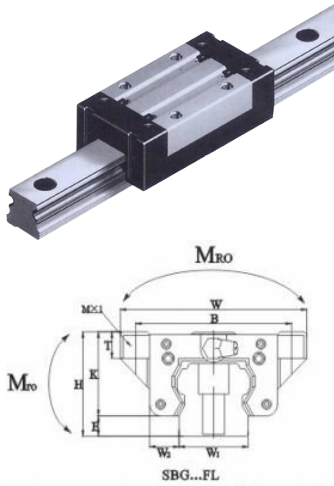

Type :	SBG30SL
Mounting Dimensions	
Height(H) :	45
E :	5.5
W2 :	16
Width(W) :	60
Length(L) :	98
Block Dimensions	
Mounting tab hole(B×J) :	40*40
Mounting tab hole(M×L) :	M8*10
L1 :	70.4
J1 :	15.2
K :	39.5
T :	8
Nipple Mounting Hole :	M6*0.75
Nipple(T1) :	11.5
Nipple(N) :	12
Rail Size	
Width(W1) :	28
Height(H1) :	25
Pitch(F) :	80
Bolt Hole(d×D×h) :	9*14*12
G :	20
Max.length Of rail Lomax :	4440
Load capacity	
Dynamic C(kgf) :	2360
Sationary Co(kgf) :	3970
Stationary moment(kgf.M) MRO :	50
Stationary moment(kgf.M) MPO :	36
Stationary moment(kgf.M) MRO :	36
Weight	
bearing (kgf) :	0.72
rail (kgf/M) :	4.5